ADAPT 100 Series

With a stylish, functional headset that works the way you do. Enjoy superior sound and contemporary design with an audio tool that adapts seamlessly – at your workstation, around the office or on your daily commute.




We are rebranding from EPOS | SENNHEISER to EPOS branding on our products. During the transition period the same product may exist in both versions


Certified for Microsoft Teams ZOOM



AVAYA DevConnect

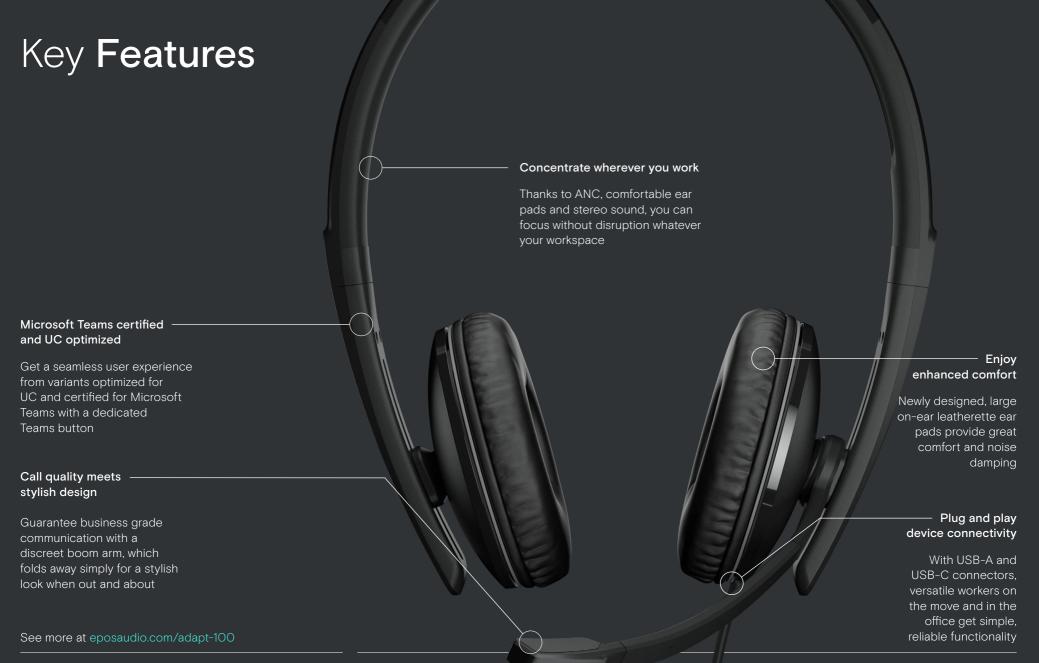


Fact Sheet

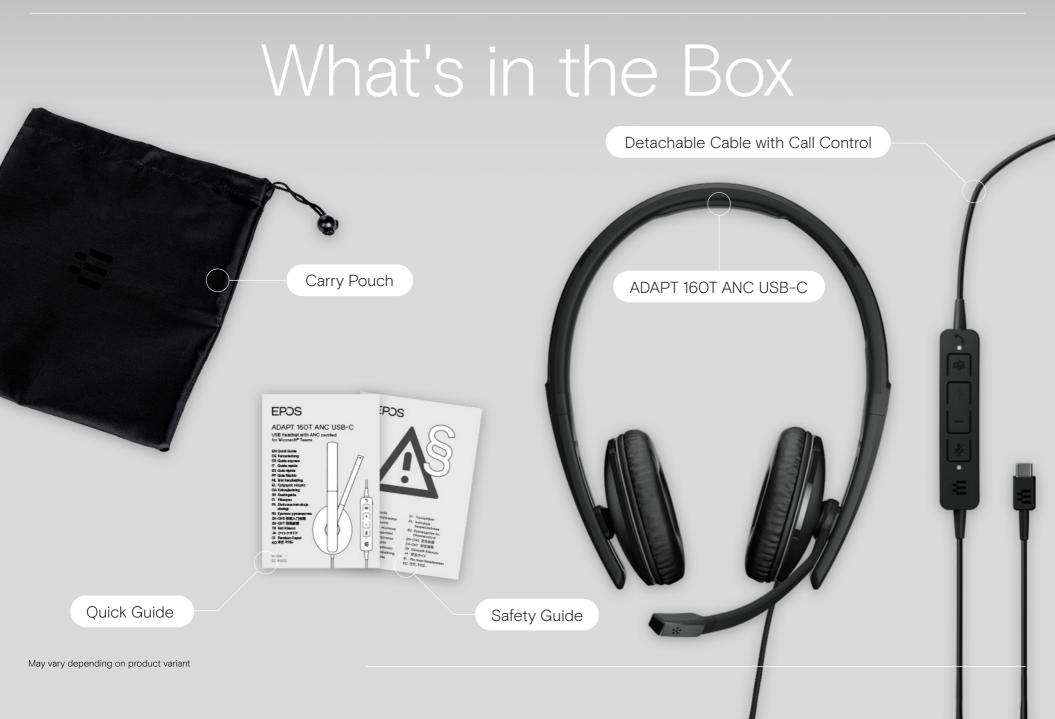


How to Use the


ADAPT 100

Adjusting and wearing the headset

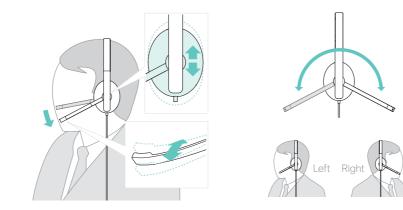

Activating/deactivating ANC*

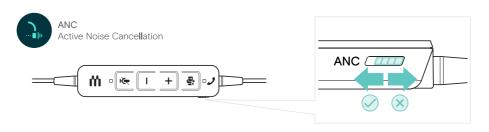

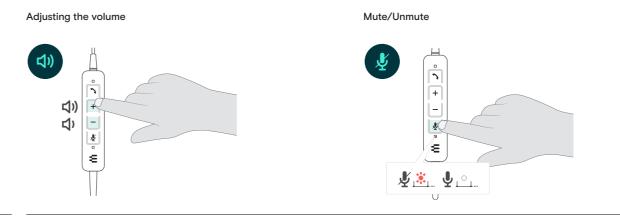

Additional benefits & features

Easy to store and portable

Thanks to an innovative fold-flat ear cup design and carry pouch



Convenient noise limiter switch

Via EPOS Connect limiting noise according to European and Australian standards

Optimize speech clarity

With noise-cancelling microphone to filter out ambient noise



Enjoy a natural listening experience With EPOS Voice™ technology Personalize for a perfect fit With an adjustable, flexible headband





1/4

General	
Wearing style	On-ear, single or double-sided headband
Headset weight	Single-sided, foam earpad 99.5 g / 3.5 oz
	Single-sided, leatherette earpads 106.6 g / 3.76 oz
	Double-sided, foam earpads 135.8 g / 4.79 oz
	Double-sided, leatherette earpads 145.3 g / 5.12 oz
Connectivity	Cable with USB-A, USB-C and 3.5 mm jack* connector. *When detached from the in-line call control
Warranty	2 years
Audio	
Speaker frequency response	20 – 20,000 Hz
Microphone type	- Dynamic, neodymium magnet speaker
Microphone frequency response	100 - 8,000 Hz
Noise cancellation	Active Noise Cancellation (ANC)
Total noise attenuation	Up to 30 dB

2/4

Products variants	What's in the box
ADAPT 16OT ANC USB-C ADAPT 165T USB-C II ADAPT 135T USB-C II ADAPT 165 USB-C II ADAPT 135 USB-C II ADAPT 165T USB II ADAPT 165T USB II	Headset, acoustic leatherette earpads mounted on headset, detachable cable with call control (USB-C/USB-A), carry pouch, quick guide, safety guide, compliance sheet
ADAPT 16OT USB II ADAPT 13OT USB II ADAPT 16O USB II ADAPT 13O USB II	Headset, acoustic foam earpads mounted on headset, detachable cable with call control (USB-A), quick guide, safety guide, compliance sheet

Software

EPOS devices can be managed with following Software solutions:

EPOS Connect

EPOS Manager

Conduct firmware updates and configure headsets for personal audio preferences. EPOS Connect works for Windows, Mac® and VDI/Thin client environments: eposaudio.com/software-epos-connect

Manage, update and configure EPOS audio devices from any location - For both cloud and on-premises solutions: eposaudio.com/software-epos-manager

3/4

Product	Connects to	Certifications	EAN code	UPC code
ADAPT 160T ANC USB-C Art. no. 1000221	PC, smartphone and tablet via USB-C*	Certified for Microsoft Teams** and optimized for UC	57 14708 00022 8	8 40064 40022 0
ADAPT 165T USB II Art. no. 1000902	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	Certified for Microsoft Teams** and optimized for UC	57 14708 00703 6	8 40064 40703 8
ADAPT 165T USB-C II Art. no. 1000906	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	Certified for Microsoft Teams** and optimized for UC	57 14708 00707 4	8 40064 40707 6
ADAPT 165 USB II Art. no. 1000916	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	Optimized for UC and certified for Google Meet, Works with Chromebook, Webex by Cisco, Avaya and Enreach	57 14708 00717 3	8 40064 40717 5
ADAPT 165 USB-C II Art. no. 1000920	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	Optimized for UC and certified for Google Meet, Works with Chromebook, Webex by Cisco and Avaya	57 14708 00721 0	8 40064 40721 2
ADAPT 135T USB-C II Art. no. 1000904	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	Certified for Microsoft Teams** and optimized for UC	57 14708 00701 2	8 40064 40701 4
ADAPT 135 USB-C II Art. no. 1000918	PC, smartphone and tablet via USB / USB-C* and 3.5 mm jack	UC optimized	5 714708 00719 7	8 40064 40719 9

4/4

Product	Connects to	Certifications	EAN code	UPC code
ADAPT 160T USB II Art. no. 1000901	PC, smartphone & tablet via USB / USB-C*	Certified for Microsoft Teams** and optimized for UC	57 14708 00702 9	8 40064 40702 1
ADAPT 160 USB II Art. no. 1000915	PC, smartphone & tablet via USB / USB-C*	Optimized for UC and certified for Zoom, Google Meet, Works with Chromebook, Webex by Cisco and Avaya	57 14708 00716 6	8 40064 40716 8
ADAPT 130T USB II Art. no. 1000899	PC, smartphone and tablet via USB / USB-C*	Certified for Microsoft Teams** and optimized for UC	57 14708 00700 5	8 40064 40700 7
ADAPT 130 USB II Art. no. 1000913	PC, smartphone and tablet via USB / USB-C*	Optimized for UC and certified for Google Meet, Works with Chromebook, Webex by Cisco, Avaya and Enreach	57 14708 00714 2	8 40064 40714 4

* USB-C connectivity is optimized for use with PC and Mac[®]. When USB-C is connected to smartphone or tablet performance is device dependent.

** Microsoft Teams certification applies when USB/USB-C dongle or cable is connected to PC or Mac®.

Spare parts

1/1

Product	Art. no.	Description	EAN code	UPC code
Earpads	1000911	Spare foam earpads for ADAPT 130T USB II, ADAPT 160T USB-II, ADAPT 130 USB II, ADAPT 160 USB II	57 14708 00712 8	8 40064 40712 0
Earpads	1000912	Spare leatherette earpads for ADAPT 135T USB-C II, ADAPT 165T USB-C II, ADAPT 135 USB-C II, ADAPT 165 USB-C II, ADAPT 165T USB II	57 14708 00713 5	8 40064 40713 7
Earpads	1000880	Spare leatherette earpads for ADAPT 160T ANC USB-C	57 14708 00682 4	8 40064 40682 6

Appendix

1/1

Additional product data

Color	Black
– EPOS Voice™ Technology	For a clear and natural listening experience
Sound pressure level (SPL)	Max. 115 dB - Limited by EPOS ActiveGard® technology
Sound enhancement profiles	Automatically adapt and optimize sound for both communication and multimedia
EPOS ActiveGard® technology	Protects users against acoustic injury caused by sudden sound burst on the line
EU Noise at Work Limiter®	Enhanced audio protection preventing listening fatigue, average 85 dB over a workday