

# COMMAND 600 Series

SC 630 ATC/C3 AG  
SC 660 ATC/C3  
SC 660 ATC/C3 AG

## Demand clarity and durability

Unleash your potential with a headset that stands up to the daily demands of ATC/C3 working environments. EPOS Voice™ technology ensures excellent communication with an ultra noise-cancelling microphone – guaranteeing commands come through loud and clear.

The series delivers extreme durability for your reliable performance; its premium quality build, with steel reinforcement at vulnerable speaker joints, ensures a robust solution and the adjustable headband and leatherette ear pads maximize comfort. EPOS ActiveGard® protects your hearing, with no risk of communication drop-out, and you can switch between air and land-based communications as your work requires. With excellent communication clarity and durability, this is an audio solution that lets you to take control when it counts.

See more at [eposaudio.com/command-sc600](https://eposaudio.com/command-sc600)



## Key benefits & features

### Excellent communication with EPOS Voice™ technology

Voice enhancing technology with ultra noise-cancelling microphone for excellent voice transmission and reception

### Protect your hearing with EPOS ActiveGard®

Guards against acoustic injury without risk of communication drop-out

### Benefit from multi-channel communication

With two channel application for air and land-based communication on SC 660 ATC/C3 AG

### Extreme durability you can rely on

With stainless steel hinge on speaker joints which lasts for the long term

### Exceptional comfort throughout your shift

With fully adjustable headband and generous leatherette ear pads made to maximize comfort

# COMMAND 600 Series

## Product data

### General

Contact pressure	SC 630: Approx. 1.0 N, SC 600: Approx. 1.5 N
Ear coupling	Supra-aural (On Ear)
Cable length	1.0 m / 3.28 ft
Weight of headset	SC 630: 77 g/2.72 oz, SC 660: 110 g/3.88 oz
Storage temperature	-55 °C - +70 °C
Operating temperature	-15 °C - +55 °C
Connector	Mini-XLR
Warranty	2 years

### Microphone

Microphone type	Electret, ultra-noise cancelling
Sensitivity	-38 dBV/Pa (12.6 mV/Pa) @ 1 KHz, +/- 3 dB
Supply voltage	1-10 V DC
Frequency response	150 - 6,800 Hz



### Packaging

Dimension of product packaging (W x H x D)	153 x 210 x 60 / 6.02 x 8.27 x 2.36
Package weight (incl. complete product and packaging)	SC 630: 220 g/7.76 oz, SC 660: 253 g/8.92 oz
Units in distributor master carton	20
Master carton weight incl. products	SC 630: 5.63 kg/198.59 oz, SC 660: 6.29 kg/221.87 oz
Dimension of master carton (W x H x D)	615 x 415 x 185 mm/24.21 x 16.34 x 7.28 in
Unit pack/end user	1

### Content of delivery

Box content	Headset, leatherette ear pads, mounted on headset, cable/clothing clip, mounted, nylon carry pouch
-------------	--

# COMMAND 600 Series

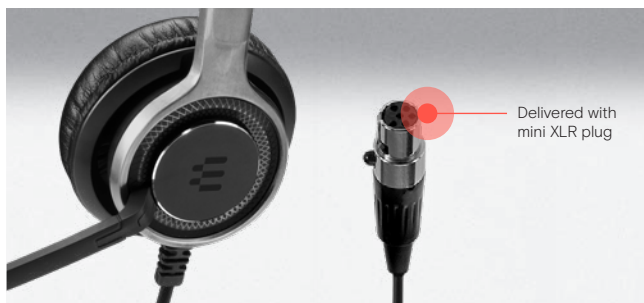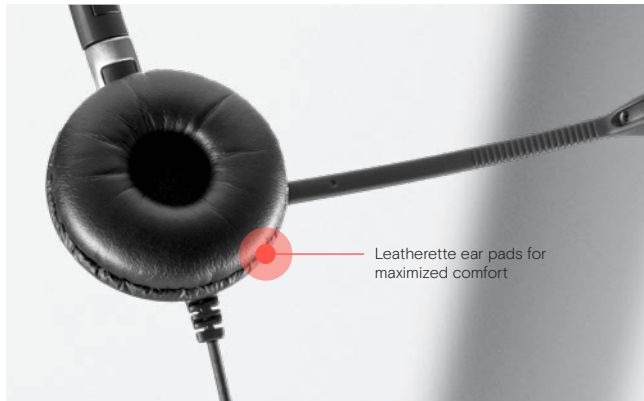

## Product data

Product	SC 630 ATC/C3 AG	SC 660 ATC/C3 AG	SC 660 ATC/C3
Art. no.	1000296	1000298	1000297
EAN code	57 14708 00097 6	57 14708 00099 0	57 14708 00098 3
UPC code	8 40064 40097 8	8 40064 40099 2	8 40064 40098 5
Wearing style	<b>SC 630:</b> Headband with side-support. <b>SC 660:</b> Headband.		

### Headphones

#### Sound pressure level:

dB SPL @ 1 kHz, 0.5 V	103	103	103
dB SPL @ 1 kHz, 1 mW	88	88	86.5
dB SPL @ 1 kHz, 1V	95,5	95,5	99,5
Max SPL	103* dB	103* dB	120 dB
THD, total harmonic distortion	<1% at 102 dB SPL at 1 kHz	<1% at 102 dB SPL at 1 kHz	<1% at 102 dB SPL at 1 kHz
Frequency response	50 – 18,000 Hz	50 – 18,000 Hz	50 – 18,000 Hz
Impedance	200 Ω	200 Ω	200 Ω

#### Connector pin\*\*:

Product	SC 260/SC 660 Series	SC 230/SC 630 Series	Headset cable wire colour
Pin 1	Mic GND	Mic GND	Shield
Pin 2	Mic +	Mic +	Red
Pin 3	SPK R***	Not connected in headset	Green
Pin 4	SPK L***	SPK +	Black
Pin 5	SPK GND	SPK GND	White

\* Limited by EPOS ActiveGard®

\*\* Seen from front of mini-XLR

\*\*\* L = mic boom arm side, R = opposite mic boom arm side